



Secure Peripheral Switching Solutions

SECURE | CERTIFIED | CONNECTED





The Solution

Belkin offers the latest Common Criteria NIAP Protection Profile 4.0- certified peripheral sharing devices designed to maintain air-gap isolation with the desktop while improving operator efficiency and effectiveness.

The ultimate security solution

All Belkin Secure Switching Products are equipped with advanced cybersecurity provisions including:

- Optical data diodes assuring unidirectional data flow from each peripheral
- Device emulation and filtering of connected USB devices
- Secured EDID emulation ensuring protection of connected monitors

Tamper-proof system

All Belkin secure switching products are equipped with an end-to-end tamper-proof system including:

- A holographic security tamper-evident label on the switch enclosure to indicate if the product has been opened or compromised
- The advanced Universal 2nd Gen Secure KVMs include an always-on, battery-backed, active anti-tamper circuit that protects the unit while in transit and after deployment
- The Universal 2nd Gen Secure KVM ship in tear-away packaging to ensure the integrity of the unit throughout the supply chain

Modular Secure KVM Series



Belkin’s Modular Secure KVM series is designed and built for government and military agencies around the world to safeguard critical data and computer systems. While only slightly larger than a modern smartphone, Belkin’s Modular Secure KVMs and KMs meet all critical security constructs to ensure air-gap isolation and system security in the smallest form factor on the market. Universal video compatibility, innovative mounting options, and an included remote control allow administrators to declutter the operator’s desk without jeopardizing control and access.

- Smallest form factor for 2- or 4-port Secure KVM
- Universal video compatibility
- Included remote control supports KVM switching while decluttering the desk
- Optional mounting hardware supports VESA and under-the-desk mounting
- Certified for NIAP Protection Profile 4.0 to meet the highest security standards
- TAA compliant, assembled in the USA
- Dedicated US-based free technical support



2-Port Single Head Modular Secure KVM Switch Base Unit PP4.0 W/ Remote
F1DN102MOD-BA-4



2-Port Dual Head Modular Secure KVM Switch Base Unit PP4.0 W/ Remote
F1DN202MOD-BA-4



4-Port Single Head Modular Secure KVM Switch Base Unit PP4.0 W/ Remote
F1DN104MOD-BA-4




4-Port Dual Head Modular Secure KVM Switch Base Unit PP4.0 W/ Remote
F1DN204MOD-BA-4

Free up your desk

With a 94% smaller footprint than other secure KVMs, the Modular Secure KVM series is designed to take up as little desk space as possible while adhering to NIAP PP PSD 4.0 requirements.

Optional mounting choices and the included remote control combine to help declutter the desk while enhancing operator ergonomics in even the most cramped work environments.

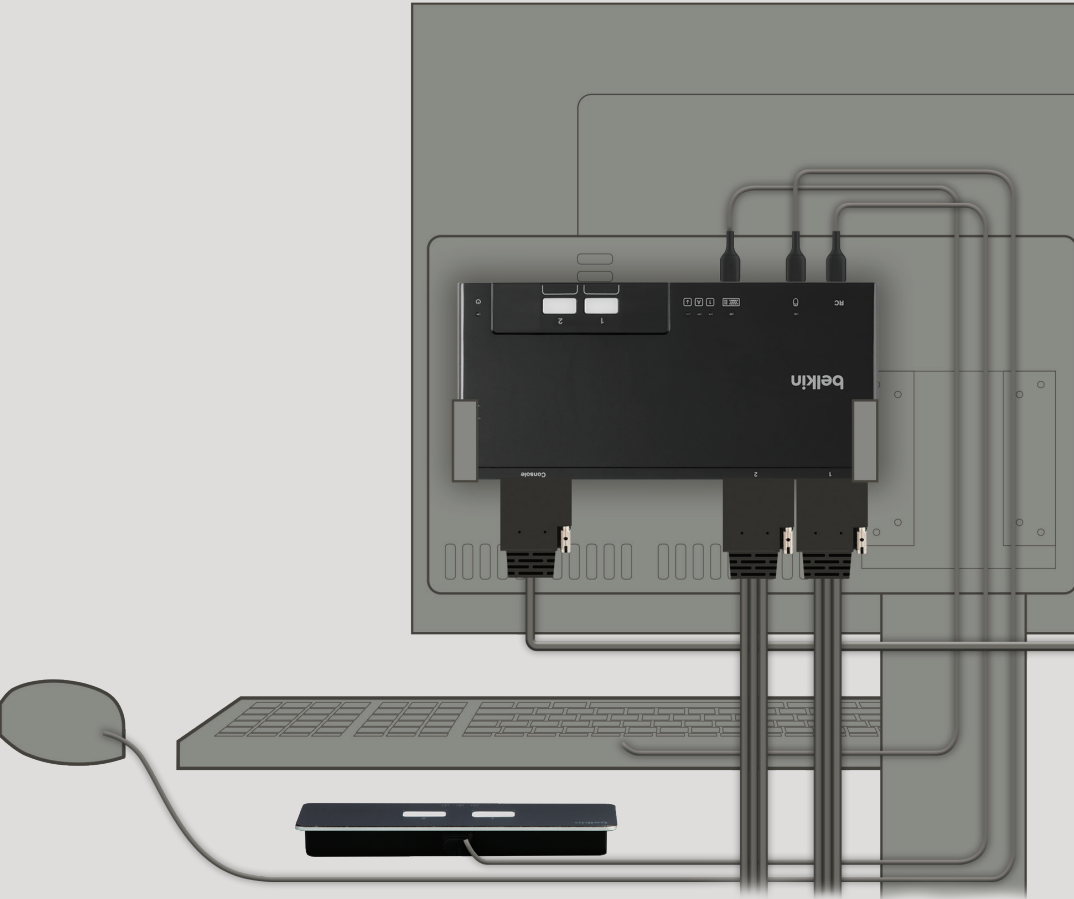

Modular Secure KVMs

Modular Secure KVM																
Part Number	F1DN102 MOD-PP-4 (Display Port)	F1DN202 MOD-PP-4 (Display Port)	F1DN104 MOD-PP-4 (Display Port)	F1DN204 MOD-PP-4 (Display Port)	F1DN102 MOD-DD-4 (DVI)	F1DN202 MOD-DD-4 (DVI)	F1DN104 MOD-DD-4 (DVI)	F1DN204 MOD-DD-4 (DVI)	F1DN102 MOD-HH-4 (HDMI)	F1DN202 MOD-HH-4 (HDMI)	F1DN104 MOD-HH-4 (HDMI)	F1DN204 MOD-HH-4 (HDMI)	F1DN102 MOD-BA-4 (BASE)	F1DN202 MOD-BA-4 (BASE)	F1DN104 MOD-BA-4 (BASE)	F1DN204 MOD-BA-4 (BASE)
No. of Computers	2	2	4	4	2	2	4	4	2	2	4	4	2	2	4	4
No. of Displays	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2
CONSOLE PORTS (DEVICES)																
Console Mouse and Keyboard Ports	USB Type-A female connector (1 designated port for mouse and 1 designated port for keyboard) with status indicator lights															
Console Remote Control Port	USB Mini (female)															
Console Video Port	DisplayPort				DVI				HDMI							
Integrated Console Cable	1x 6 ft. (1.8m) single-monitor integrated video cable	1x 6 ft. (1.8m) dual-monitor integrated video cable	1x 6 ft. (1.8m) single-monitor integrated video cable	1x 6 ft. (1.8m) dual-monitor integrated video cable	1x 6 ft. (1.8m) single-monitor integrated video cable	1x 6 ft. (1.8m) dual-monitor integrated video cable	1x 6 ft. (1.8m) single-monitor integrated video cable	1x 6 ft. (1.8m) dual-monitor integrated video cable	1x 6 ft. (1.8m) single-monitor integrated video cable	1x 6.ft. (1.8m) dual-monitor integrated video cable	1x 6 ft. (1.8m) single-monitor integrated video cable	1x 6 ft. (1.8m) dual-monitor integrated video cable	Optional cables to provide DP, DVI, HDMI, mDP, VGA			
Max Resolution Supported	3840 x 2160 pixels (UHD 4K) @ 30Hz															
COMPUTER PORTS																
Computer Keyboard/Mouse Port	USB Type A															
Computer Video Port	DisplayPort				DVI				HDMI							
Integrated Computer Cable	2x 6 ft. (1.8m) integrated cables for video and USB		4x 6 ft. (1.8m) integrated cables for video and USB		2x 6 ft. (1.8m) integrated cables for video and USB		4x 6 ft. (1.8m) integrated cables for video and USB		2x 6 ft. (1.8m) integrated cables for video and USB		4x 6 ft. (1.8m) integrated cables for video and USB		Optional cables to provide DP, DVI, HDMI, mDP, VGA, USB-C w/USB to support keyboard, video, and mouse			
PHYSICAL																
Dimensions	3.5 (W) x 7.5 (D) x .6 (H) in. / 90 (W) x 190 (D) x 15 (H) mm (unit w/out cables)															
Weight	.55 lbs. (0.25 kg.) (unit w/out cables)															
POWER																
Power Requirements	12V, 2.5A DC															
AC Input	100–240VAC															
Power Type	External with WW mains connectors															
ENVIRONMENTAL																
Operating Temperature	32° to 104° F (0° to 40° C)															
Storage Temperature	-4° to 140° F (-20° to 60° C)															
Humidity Storage and Use	0-80% RH, non-condensing															
CERTIFICATION																
Security Accreditation	NIAP Protection Profile PSD Ver. 4.0, Audio Input v 1.0. Keyboard/Mouse v 1.0. Video/Display v 1.0 TEMPEST variants available via an SDIP-55 NATO accredited TEMPEST test facility															
Regulatory Compliance	FCC Class A, CE, UL, ICES, RCM, RoHS, UKCA															
GENERAL INFORMATION																
Made in	Designed in California. Assembled in USA with USA-based technical support (TAA compliant)															
Product Life-Cycle	5 years															
Warranty	3 years standard (upgradeable to 4 or 5 years)															
Enclosure	Diecast aluminum															

Accessories Modular Secure KVMs

Modular Secure KVM Accessories				
F1DN-MOD-VMOUNT	F1DN-MOD-MOUNT	F1DN-MOD-EXH-04	F1DN-MOD-EXC-04	F1DN-WSMOUNT
Belkin Modular KVM/KM VESA Mount	Belkin Modular KVM/KM Under-Desk Mount	Belkin Modular Dual or Single Head Host Extension Cable 4 feet	Belkin Modular Dual or Single Head Console Extension Cable 4 feet	Belkin Work Surface Mount for SKVM/SKM
F1DN-MOD-CEXTC6		F1DN-MOD-HEXRC6		F1DN-MOD-CEXTFI
				F1DN-MOD-HEXRFI
Belkin Modular KVM Console Side CAT5 Extender		Belkin Modular KVM Host Side CAT5 Extender	Belkin Modular KVM Console Side Fiber Extender	Belkin Modular KVM Host Side Fiber Extender

Modular Secure KVM Replacement Parts		
0401-00811	F1DN-MOD-REM2	F1DN-MOD-REM4
Belkin Modular KVM/KM Power Adapter 12V 2.5A, w/ Interchangeable Mains Connector Wall Mount	Belkin Modular KVM/KM Replacement Remote Control, 2 Port	Belkin Modular KVM/KM Replacement Remote Control, 4 Port

Modular Secure KM Series



Supporting two or four computers, the Belkin Modular Secure KM series is ideal for desktops that require multiple monitors for real-time monitoring and response. Each computer remains directly connected to its own monitor or monitors while the secure KM switches USB keyboard and mouse control with a simple keyboard key press and cursor move to the active computer. Modular Secure KM units are shipped with a complete set of connecting cables and a remote-control unit, should a user desire a button push to switch the keyboard and mouse to a different computer.

- Smallest form factor for 2- or 4-port Secure KVM
- Included remote control supports KM control switching while decluttering the desk
- Optional mounting hardware supports VESA mounting and under-the-desk mounting
- Certified for NIAP Protection Profile 4.0 to meet the highest security standards
- TAA compliant, assembled in the USA
- Dedicated, USA-based free technical support

Modular Secure KMs

Modular Secure KM		
Part Number	F1DN002MOD-KM-4	F1DN004MOD-KM-4
No. of Computers	2	4
No. of Displays	Up to 8	
CONSOLE PORTS (DEVICES)		
Console Mouse and Keyboard Ports	USB Type-A female connector (1 designated port for mouse and 1 designated port) for keyboard with status indicator lights	
Console Remote Control Port	USB Mini (female)	
Console Video Port	None	
Max Resolution Supported	N/A	
COMPUTER PORTS		
Computer Keyboard/Mouse Port	USB Type A	
Computer Video Port	None	
Integrated Computer Cable	2x 6 ft. (1.8m) integrated cables for USB	4x 6 ft. (1.8m) integrated cables for USB
PHYSICAL		
Dimensions	3.5 (W) x 7.5 (D) x .6 (H) in. / 90 (W) x 190 (D) x 15 (H) mm (unit wo/cables)	
Weight	.55 lbs. (.25 kg) (unit w/o cables)	
POWER		
Power Requirements	12V, 2.5A DC	
AC Input	100–240VAC	
Power Type	External with WW mains connectors	
ENVIRONMENTAL		
Operating Temperature	32° to 104° F (0° to 40° C)	
Storage Temperature	-4° to 140° F (-20° to 60° C)	
Humidity Storage and Use	0-80% RH, non-condensing	
CERTIFICATION		
Security Accreditation	NIAP Protection Profile PSD Ver. 4.0, Keyboard/Mouse v 1.0. TEMPEST variants available via an SDIP-55 NATO accredited TEMPEST test facility.	
Regulatory Compliance	FCC Class A, CE, UL, ICES, RCM, RoHS, UKCA	
GENERAL INFORMATION		
Made in	Designed in California. Assembled in USA with USA-based technical support (TAA compliant).	
Product Life-Cycle	5 years	
Warranty	3 years standard (upgradeable to 4 or 5 years)	
Enclosure	Diecast aluminum	

Accessories Modular Secure KMs

Modular Secure KM Accessories		
F1DN-MOD-VMOUNT	F1DN-MOD-MOUNT	F1DN-WSMOUNT
Belkin Modular KVM/KM VESA Mount	Belkin Modular KVM/KM Under Desk Mount	Belkin Work Surface Mount for SKVM/SKM

Modular Secure KM Replacement Parts			
0401-00811	F1DN-MOD-REM2	F1DN-MOD-REM4	F1DN1MOD-USB-06
Belkin Modular KVM/KM Power Adapter 12V 2.5A, w/ Interchangeable Mains Connector Wall Mount	Belkin Modular KVM/KM Replacement Remote Control, 2 Port	Belkin Modular KVM/KM Replacement Remote Control, 4 Port	Belkin Modular USB Cable for KM, 6 ft.

Universal 2nd Generation Secure KVM Series



Belkin's Universal 2nd Gen Secure KVM series combines cutting-edge cybersecurity provisions, video performance, and user experience to deliver a no-compromise solution for the most demanding applications. Compatible with the KVM Remote Control with Integrated Keyboard, combining channel selection with a backlit, mechanical USB keyboard to reduce operator error while decluttering the operator's desktop.


- Available in 2-, 4-, 8-, and 16-channel ports with a choice of single or dual monitors for 1-8 port models, single monitor for 16-port model
- Future-proof design supports current and upcoming video standards at up to 4k@60Hz with optional passive and active TAA compliant cables
- Optional KVM remote with integrated keyboard supports full KVM switching control for the ultimate operator experience
- Certified for NIAP Protection Profile 4.0 to meet the highest security standards
- USA-based free technical support



Front of Universal 2nd Generation Secure KVMs



Rear of Universal 2nd Generation Secure KVMs

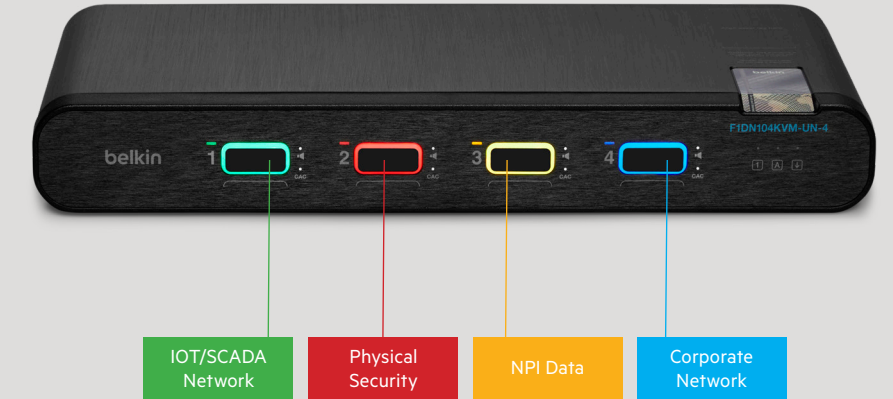

The color of efficiency

Customizable port coloring and naming on the front panel of the Universal 2nd Generation Secure KVM facilitates channel identification and reduces operator errors.



Control the KVM from the keyboard

The industry-first KVM Remote Control with Integrated Keyboard provides full control of and is exclusively compatible with Belkin's Universal 2nd Generation Secure KVM. This allows the secure KVM to be located off the desk for a clean and decluttered workstation. The keyboard's LED backlighting and status indicators mimic the front panel configuration of the secure KVM in order to reinforce the security enclave the operator is working on. This helps to minimize operator error while enhancing workspace ergonomics.

Universal 2nd Gen Secure KVMs

Universal 2nd Gen Secure KVM											
Part Number	F1DN102 KVM-UN-4 (W/CAC)	F1DN102 KVM-UNN4	F1DN202 KVM-UN-4 (W/CAC)	F1DN202 KVM-UNN4	F1DN104 KVM-UN-4 (W/CAC)	F1DN104 KVM-UNN4	F1DN204 KVM-UN-4 (W/CAC)	F1DN204 KVM-UNN4	F1DN108 KVM-UN-4 (W/CAC)	F1DN208 KVM-UN-4 (W/CAC)	F1DN116 KVM-UN-4 (W/CAC)
No. of Computers	2	2	2	2	4	4	4	4	8	8	16
No. of Displays	1	1	2	2	1	1	2	2	1	2	1
CAC/Audio Freeze	Yes	No	Yes	No	Yes	No	Yes	No	Yes	Yes	Yes
Front Panel Illumination / Multi Color	Yes										
Belkin SKVM Remote Control with Integrated keyboard Compatible	Yes										No
CONSOLE PORTS (DEVICES)											
Console Mouse and Keyboard Ports	USB Type-A female connector (1 designated port for mouse and 1 designated port for keyboard) with status indicator lights										
Console Audio Jack	USB Mini (female)										
Console Remote Control Port	RJ14 female										
Console CAC/DPP Port	USB Type-A female connector										
Console Video Port	DisplayPort/HDMI combo connector										
Max Resolution Supported	3840 x 2160 pixels (UHD 4K) @ 60Hz - 2560 x 1600 pixels @ 120Hz										
COMPUTER PORTS											
Computer Audio Jack	1/8" (3.5mm) female										
Computer Keyboard/Mouse Port	USB Type B										
Computer Video Port	DisplayPort/HDMI combo connector										
PHYSICAL											
Dimensions	12.5 (W) x 1.9 (H) x 6.2 (L) in. /317.5 (W) x 48.3 (H) x 162.6 (L) mm						12.5 (W) x 2.5 (H) x 6.2 (L) in. /317.5 (W) x 63.5 (H) x 162.6 (L) mm		17.2 (W) x 1.6 (H) x 8.1 (D) in. / 436.9 (W) x 40.6 (H) x 205.7 (D) mm	17.2 (W) x 3.5 (H) x 8.1 (D) in. / 436.9 (W) x 88.9 (H) x 205.7 (D) mm	17.2 (W) x 3.8 (H) x 8.1 (D) in. / 436.9 (W) x 88.9 (H) x 205.7 (D) mm
Weight	3.9 lbs. (1.77 kg.)						4.85 lbs. (2.2 kg.)		9.8 lbs. (4.4 kg.)	13.07 lbs. (5.9 kg.)	13.76 lbs. (6.24 kg.)
POWER											
Power Requirements	12VDC, 2.5A								12V, 4.0A DC		
AC Input	100–240VAC										
Power Type	External with WW mains connectors								Internal with WW mains connectors on power cord		
ENVIRONMENTAL											
Operating Temperature	32° to 104° F (0° to 40° C) for Video and USB										
Storage Temperature	-4° to 140° F (-20° to 60° C)										
Humidity Storage and Use	0-80% RH, non-condensing										
CERTIFICATION											
Security Accreditation	NIAP Protection Profile PSD Ver. 4.0, Audio Input v 1.0. Keyboard/Mouse v 1.0. Video/Display v 1.0 User Authentication (by model), TEMPEST variants available via an SDIP-55, NATO accredited TEMPEST test facility.										
Regulatory Compliance	FCC Class A, CE, UL, ICES, RCM, RoHS, UKCA										
GENERAL INFORMATION											
Made in	Designed in California. Assembled in USA with USA-based technical support (TAA compliant).										
Product Life-Cycle	5 years										
Warranty	3 years standard (upgradeable to 4 or 5 years)										
Enclosure	Extruded aluminum								Formed steel		

Accessories

Universal 2nd Gen Secure KVMs

Universal 2nd Gen Secure KVM Accessories				
F1DN008KBD	F1D006	F1D008	F1DN-DCUAP-UN-4	F1DN-KVM-EXTC6
Secure KVM Remote Control w/Integrated Keyboard	Desk mount for F1DN102KVM-UN-4, F1DN202KVM-UN-4, F1DN104KVM-UN-4 (and UNN variants)	Desk mount for F1DN204KVM-UN-4 (and UNN variants)	Belkin PP4,0 SKVM to DCU Adapter	Belkin KVM Console Side CAT5 Extender-Universal Video
F1DN-KVM-EXRC6	F1DN-KVM-EXTFI	F1DN-KVM-EXRFI	F1DN002R	F1DN003R
Belkin KVM Host Side CAT5 Extender-Universal Video	Belkin KVM Console Side Fiber Extender-Universal Video	Belkin KVM Host Side Fiber Extender-Universal Video	4 Button DCU for 4 port Belkin Secure KVM Switches, with LCD Display	3 Button DCU for 4-16 port Belkin Secure KVM Switches, with LCD Display

Universal 2nd Gen Secure KVM Replacement Parts	
0401-00809	
Belkin Universal 2- and 4-Port KVM/KM Power Adapter 12V 2.5A, w/ Interchangeable Mains Connector Wall Mount	

Cables

Modular Secure KVMs

Host Single-Head Cables for Modular Secure KVM					
Part Number	F1DN1MOD-HC-H06	F1DN1MOD-HC-P06	F1DN1MOD-HC-D06	F1DN1MOD-HC-V06	F1DN1MOD-HC-M06
Description	Belkin Modular HDMI Single-Head Host Cable, 6 ft.	Belkin Modular DP Single-Head Host Cable, 6 ft.	Belkin Modular DVI Single-Head Host Cable, 6 ft.	Belkin Modular VGA W/Audio Single-Head Host Cable, 6 ft.	Belkin Modular Mini DP Single-Head Host Cable, 6 ft.
Part Number	F1DN1MOD-HC-U03	F1DN-NETPWR	F1DN-MOD-EXH-04		
Description	Belkin Modular USB-C Single-Head Host Cable, 3 ft.	TAA USB-C Device Ethernet Network and Charging Adapter	Belkin Modular Dual or Single Head Host Extension Cable, 4 ft.		

Host Dual-Head Cables for Modular Secure KVM					
Part Number	F1DN2MOD-HC-H06	F1DN2MOD-HC-P06	F1DN2MOD-HC-D06	F1DN2MOD-HC-V06	F1DN2MOD-HC-M06
Description	Belkin Modular HDMI Dual-Head Host Cable, 6 ft.	Belkin Modular DP Dual-Head Host Cable, 6 ft.	Belkin Modular DVI Dual-Head Host Cable, 6 ft.	Belkin Modular VGA W/Audio Dual-Head Host Cable, 6 ft.	Belkin Modular Mini DP Dual-Head Host Cable, 6 ft.
Part Number	F1DN2MOD-HC-U03	F1DN-NETPWR	F1DN2MOD-HC-HP6	F1DN2MOD-HC-DP6	F1DN-MOD-EXH-04
Description	Belkin Modular USB-C Dual-Head Host Cable, 3 ft.	TAA USB-C Device Ethernet Network and Charging Adapter	Belkin Modular HDMI and DP Dual-Head Host Cable, 6 ft.	Belkin Modular DVI and DP Dual-Head Host Cable, 6 ft.	Belkin Modular Dual or Single Head Host Extension Cable, 4 ft.

Console Single-Head Cables for Modular Secure KVM					
Part Number	F1DN1MOD-CC-H06	F1DN1MOD-CC-P06	F1DN1MOD-CC-D06	F1DN1MOD-CC-V06	F1DN-MOD-EXC-04
Description	Belkin Modular HDMI Single-Head Console Cable, 6 ft.	Belkin Modular DP Single-Head Console Cable, 6 ft.	Belkin Modular DVI Single-Head Console Cable, 6 ft.	Belkin Modular VGA W/Audio Single-Head Console Cable, 6 ft.	Belkin Modular Dual or Single Head Console Extension Cable, 4 ft.
Part Number	F1DN1MOD-CC-H03	F1DN1MOD-CC-P03	F1DN1MOD-CC-D03		
Description	Belkin Modular HDMI Single-Head Console Cable, 3 ft.	Belkin Modular DP Single-Head Console Cable, 3 ft.	Belkin Modular DVI Single Head Console Cable, 3 ft.		

Console Dual-Head Cables for Modular Secure KVM					
Part Number	F1DN2MOD-CC-H06	F1DN2MOD-CC-P06	F1DN2MOD-CC-D06	F1DN2MOD-CC-V06	F1DN-MOD-EXC-04
Description	Belkin Modular HDMI Dual-Head Console Cable, 6 ft.	Belkin Modular DP Dual-Head Console Cable, 6 ft.	Belkin Modular DVI Dual-Head Console Cable, 6 ft.	Belkin Modular VGA W/Audio Dual-Head Console Cable, 6 ft.	Belkin Modular Dual or Single Head Console Extension Cable, 4 ft.
Part Number	F1DN2MOD-CC-H03	F1DN2MOD-CC-P03	F1DN2MOD-CC-D03		
Description	Belkin Modular HDMI Dual-Head Console Cable, 3 ft.	Belkin Modular DP Dual-Head Console Cable, 3 ft.	Belkin Modular DVI Dual-Head Console, 3 ft.		

Cables

Universal 2nd Gen Secure KVMs

Single-Output PC								
KVM PC Connection Combo Cables	DP to DP	DP to DP	mDP to DP	mDP to DP	HDMI to HDMI	HDMI to HDMI	DVI to HDMI	DVI to HDMI
Part Number	F1D9019b06†	F1D9019b10†	F1DN1CCBL-MP6†	F1DN1CCBL-MP10†	F1DN1CCBL-HH6†	F1DN1CCBL-HH10†	F1DN1CCBL-DH6†	F1DN1CCBL-DH10†
Description	TAA DP/USB/AUD SKVM CBL, DP M/M; USB A/B, 6 ft.	TAA DP/USB/AUD SKVM CBL, DP M/M; USB A/B, 10 ft.	TAA MDP to DP/USB/AUD CBL, VID M/M; USB A/B, 6 ft.	TAA MDP to DP/USB/AUD CBL, DP M/MDP M; USB A/B, 10 ft.	TAA HDMI/USB/AUD CBL, HDMI M/M; USB A/B, 6 ft.	TAA HDMI/USB/AUD CBL, HDMI M/M; USB A/B, 10 ft.	TAA DVI to HDMI/USB/AUD CBL, VID M/M; USB A/B, 6 ft.	TAA DVI to HDMI/USB/AUD CBL, VID MM; USB A/B, 10 ft.
KVM PC Connection Combo Cables	USB-C to DP	USB-C to DP	VGA to HDMI					
Part Number	F1DN1CCBL-CP6†	F1DN-NETPWR	F1DN1CCBL-VH-10					
Description	TAA USB-C to DP/USB/AUD CBL VID M; USB B, 6 ft.	TAA USB-C DEVICE ETHERNET NETWORK AND CHARGING ADAPTER	VGA TO HDMI/USB/AUD CBL VGA/HDMI MM, USB A/B, 10ft.					

Dual-Output PC								
KVM PC Connection Combo Cables	DP to DP	DP to DP	mDP to DP	mDP to DP	HDMI to HDMI and DP to DP	HDMI to HDMI and DP to DP	DVI to HDMI and DP to DP	DVI to HDMI and DP to DP
Part Number	F1D9020b06†	F1D9020b10†	F1DN2CCBL-MP6†	F1DN2CCBL-MP10†	F1DN2CC-HHPP6†	F1DN2CC-HHPP10†	F1DN2CC-DHPP6†	F1DN2CC-DHPP10†
Description	TAA DUAL DP/USB/AUD SKVM CBL, DP M/M; USB A/B, 6 ft.	TAA DUAL DP/USB/AUD SKVM CBL, USB A/B, 10 ft.	TAA 2 MDP to DP/USB/AUD CBL, VID M/M; USB A/B, 6 ft.	TAA 2 MDP to DP/USB/AUD CBL, VID M/M; USB A/B, 10 ft.	TAA (1) HDMI-HDMI (1) DP-DP/USB/AU CBL, 6 ft.	TAA (1) HDMI-HDMI (1) DP-DP/USB/AU CBL, 10 ft.	TAA (1) DVI to HDMI (1) DP to DP/USB/AUD CBL, 6 ft.	TAA (1) DVI to HDMI (1) DP to DP/USB/AUD CBL, 10 ft.
KVM PC Connection Combo Cables	HDMI to HDMI	HDMI to HDMI	DVI to HDMI	DVI to HDMI	USB-C to DP	USB-C to DP		
Part Number	F1DN2CCBL-HH6†	F1DN2CCBL-HH10†	F1DN2CCBL-DH6†	F1DN2CCBL-DH10†	F1DN2CCBL-CP6†	F1DN-NETPWR		
Description	TAA DUAL HDMI/USB/AUD CBL, HDMI M/M; USB A/B, 6 ft.	TAA DUAL HDMI/USB/AUD CBL, HDMI M/M; USB A/B, 10 ft.	TAA 2 DVI to HDMI/USB/AUD CBL, VD MM; USB A/B, 6 ft.	TAA 2 DVI to HDMI/USB/AUD CBL, VD MM; USB A/B, 10 ft.	TAA DUAL USB-C to DP/USB/AUD CBL VID M; USB B, 6 ft.	TAA USB-C DEVICE ETHERNET NETWORK AND CHARGING ADAPTER		

Video Cables								
KVM to Monitor Video Cables	DP to DP	DP to DP	mDP to DP	mDP to DP	HDMI to HDMI	HDMI to HDMI	DVI to HDMI	DVI to HDMI
Part Number	F1DN1VCBL-PP6†	F1DN1VCBL-PP10†	F1DN1VCBL-MP6†	F1DN1VCBL-MP10†	F1DN1VCBL-HH6†	F1DN1VCBL-HH10†	F1DN1VCBL-DH6†	F1DN1VCBL-DH10†
Description	TAA DP/DP VIDEO CBL, DP M/M; 6 ft.	TAA DP/DP VIDEO CBL, DP M/M; 10 ft.	TAA MDP/DP VIDEO CBL, mDP M/DP M; 6 ft.	TAA MDP/DP VIDEO CBL, mDP M/DP M; 10 ft.	TAA HDMI/HDMI SKVM VIDEO CBL, HDMI M/M; 6 ft.	TAA HDMI/HDMI SKVM VIDEO CBL, HDMI M/M; 10 ft.	TAA HDMI/DVI SKVM VIDEO CBL, HDMI M/DVI M; 6 ft.	TAA HDMI/DVI SKVM VIDEO CBL, HDMI M/DVI M; 10 ft.

Accessory Cables						
Other Cables/Adapters	CAC	CAC	USB/Audio	USB/Audio	DCU	
Part Number	F1D9013b06†	F1D9013b10†	F1D9022b06†	F1D9022b10†	F1D9026-50	
Description	TAA USB A TO USB B CABLE FOR CAC READER, 6 ft.	TAA USB A TO USB B CABLE FOR CAC READER, 10 ft.	TAA USB KEYBOARD/MOUSE/AUDIO COMBO CABLE, 6 ft.	TAA USB KEYBOARD/MOUSE/AUDIO COMBO CABLE, 10 ft.	50 ft. RJ25 EXTENSION FOR DCU	

The Belkin Difference



USA-based
product support



Hassle-free
replacement



3-Year Warranty
with Optional
Extension of
1-2 Years



Exclusively produced
in the USA with TAA-
compliant accessories

Who We Are

At Belkin International, we create products that help people realize the power of technology and make people's lives better, easier, and more fulfilling. This has been Belkin's mission since our inception in 1983. As a leading provider of secure KVM switches for mission-critical applications, we positively impact and improve worker efficiency by delivering innovation and peace of mind to users working across multiple security enclaves. Our offer is certified to the latest Common Criteria NIAP Protection Profile for Peripheral Sharing Devices version 4.0 along with all applicable modules.

Belkin International, Inc.
12045 E. Waterfront Drive,
Playa Vista, CA 90094
(310) 751-5569
belkin.com/cybersecurity

SUPPORT
Secure KVM Support 800-282-2355

SALES
FederalBusinessDivision@belkin.com

LinkedIn:



Brochure to download:

